


SEFUSE D6SA

Battery Protectors



- Battery packs for:
- Notebook PCs
- Rechargeable power and garden tools
- Cordless vacuum cleaners
- E-bikes




CHATHAM COMPONENTS INC.
 Authorized distributor for Elcut thermal links
www.cci-tco.com 908-840-4428

Specifications


Part Number	Rated Current (A)	Rated Voltage (Vdc)	Breaking Capacity (A)	Fuse Resistance (mΩ)	Applicable Series Cell Number	Applicable Voltage Range (V)	Heater Resistance (Ω)
D6SA2-12	12	36	50	2.0±1.0	1 and 2	4.0~9.0	2.15±20%
D6SA3-12					3	7.4~13.8	7.3±20%
D6SA4-12					4	10.5~19.6	14.7±20%
D6SA3-15	15	36	50	1.5±1.0	3	7.4~13.8	6.9±20%
D6SA4-15					4	10.5~19.6	14.0±20%
D6SA5-15					5	14.4~23.5	21.6±20%
D6SA2-20	20	36	50	0.8±0.5	2	5.0~9.0	2.6±20%
D6SA3-20					3	9.9~13.5	10.2±20%
D6SA4-20					4	13.4~18.4	18.7±20%
D6SA5-20					5	17.1~23.5	30.4±20%
D6SA03-30	30	62	80	0.6±0.5	3	9.9~13.5	6.05±20%
D6SA04-30					4	13.4~18.4	11.05±20%
D6SA05-30					5	17.1~23.5	18.0±20%
D6SA06-30					6	20.0~27.5	24.7±20%
D6SA07-30					7	23.0~31.5	32.6±20%
D6SA09-30					9-10	28.0-45.0	60.0±15%
D6SA10-30					9-10	34.2~46.9	75.0±15%
D6SA14-30	13-14	49.0~62.0	154.0±15%				

Safety Standards: UL - E357922, TUV - J50247451 Note: 20 Amp units pending TUV approval

Dimension (mm)

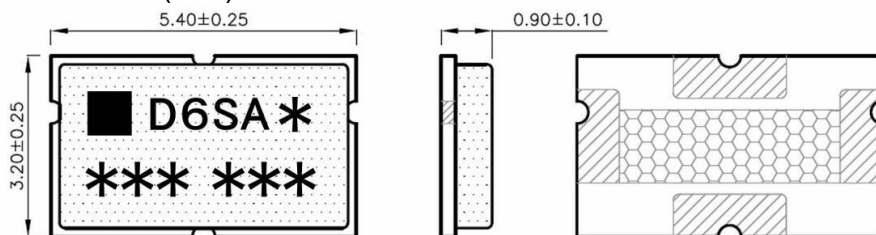

Wiring Diagram

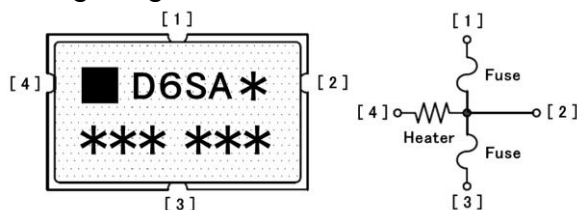

*For proper operation, manufacturer's installation cautions must be followed. Please contact SCHOTT for questions and complete installation cautions.