


SEREB[®] thermal battery protection switch - Ratings

Part Number	Action Temperature	Internal Resistance	Contact Rating	Maximum Interrupting Current	Maximum Interrupting Voltage	Self Holding Minimum Voltage	Self Holding Maximum Current	UL	TÜV
SB72X2	72±5 °C	≅ 8 mΩ	DC10 V/12 A 6000 Cycle	DC5 V/40 A 100 Cycle	DC28 V/5 A 100 Cycle	2 V (25 °C)	150 mA (25 °C)	E344840	R50251001
SB77X2	77±5 °C								
SB82X2	82±5 °C								
SB85X2	85±5 °C								

Dimensions (Unit: mm)

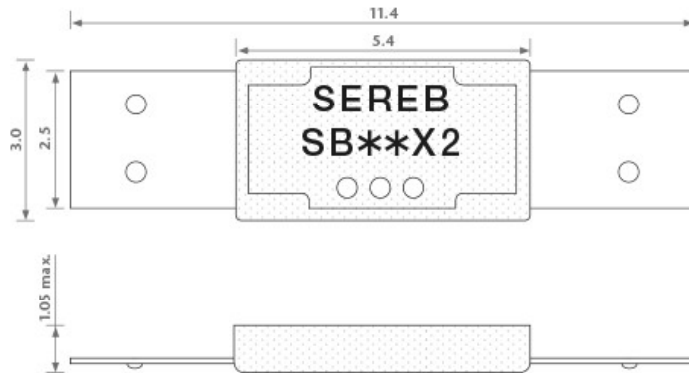

Structure

