



SEFUSE D6SE

Battery Protectors

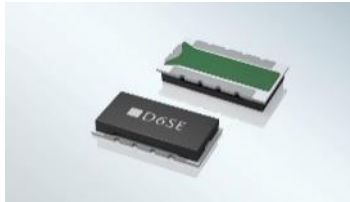

- Battery packs for:
- Rechargeable power and garden tools
- Cordless & robotic vacuum cleaners
- E-bikes and E-motorcycles
- Energy storage systems




CHATHAM COMPONENTS INC.
 Authorized distributor for Elcut thermal links
www.cci-tco.com 908-840-4428

Specifications


Part Number	Rated Current (A)	Rated Voltage (Vdc)	Breaking Capacity (A)	Fuse Resistance (mΩ)	Applicable Series Cell Number	Applicable Voltage Range (V)	Heater Resistance (Ω)
D6SE02-30	30	80	80	1.5 ± 0.5	1 - 2	4.0 ~ 9.6	.90 ± 20%
D6SE03-30					3	8.4 ~ 19.1	4.50 ± 20%
D6SE05-30					4 - 5	10.5 ~ 23.5	6.85 ± 20%
D6SE09-30					6 - 9	20.2 ~ 46.3	26.00 ± 20%
D6SE14-30					10 - 14	28.0 ~ 62.0	50.00 ± 20%
D6SE03-45	45	80	120	1.4 ± 0.4	3	9.8 ~ 13.5	2.65 ± 20%
D6SE04-45					4	13.0 ~ 18.4	4.65 ± 20%
D6SE05-45					5	16.7 ~ 23.5	7.70 ± 20%
D6SE07-45					6 - 7	22.3 ~ 31.5	14.40 ± 20%
D6SE10-45					9 - 10	33.0 ~ 46.9	31.40 ± 20%
D6SE14-45					12 - 14	43.7 ~ 62.0	55.20 ± 20%

* UL/TÜV approval pending.

Dimension (mm)

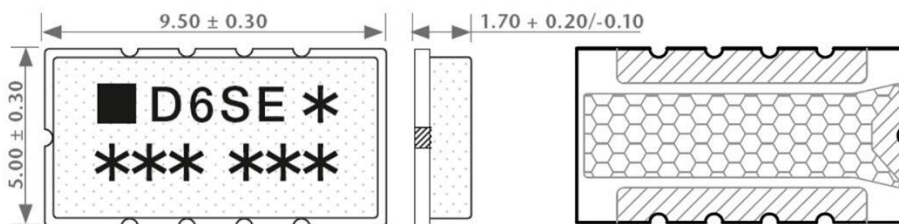

Wiring Diagram

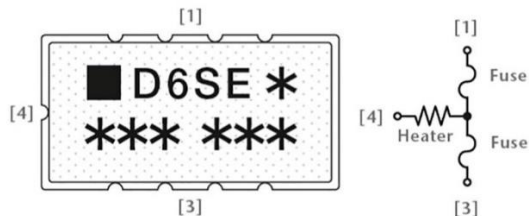

*For proper operation, manufacturer's installation cautions must be followed. Please contact SCHOTT for questions and complete installation cautions.